
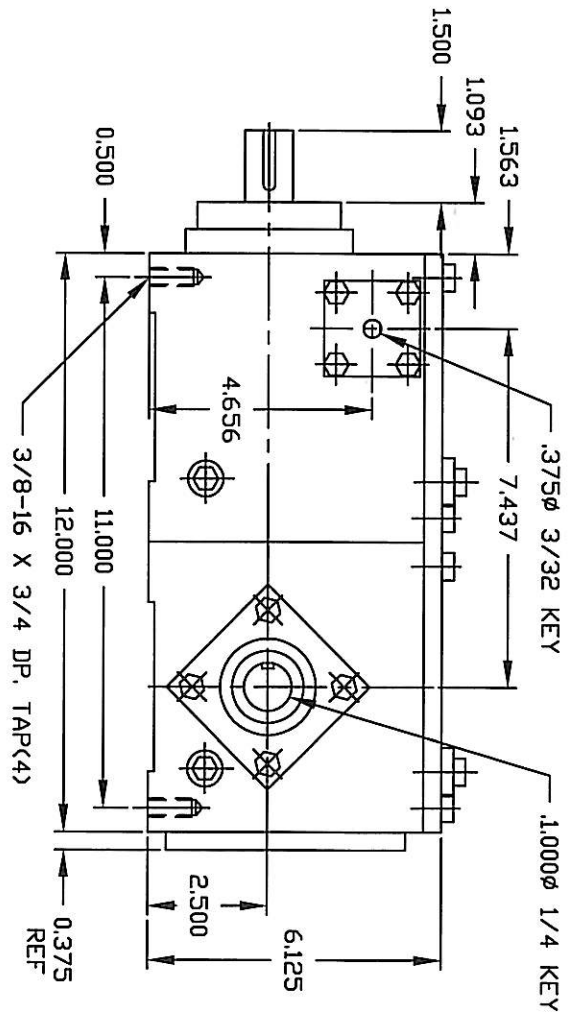
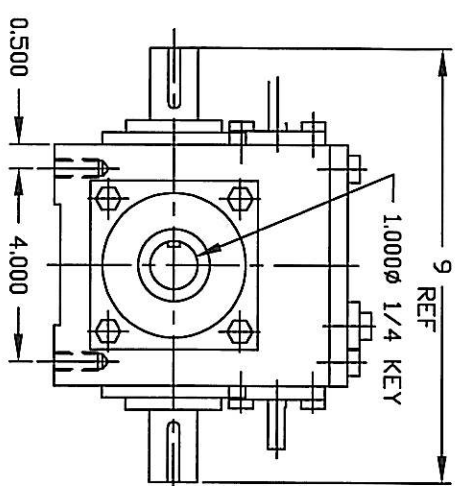
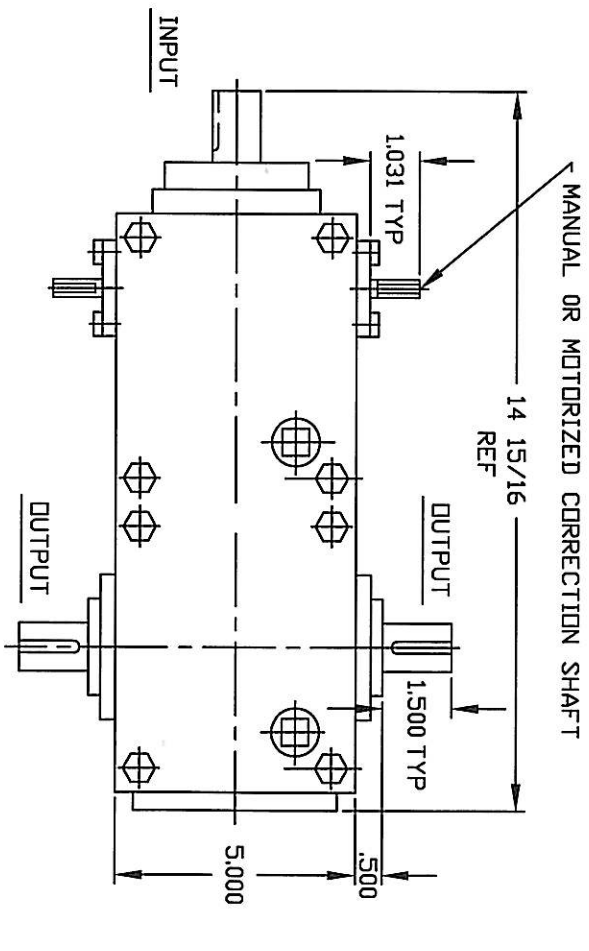


CORRECTION RATIO					
MODEL	# OF TURNS CORR. SHAFT	INPUT SHAFT	# OF DEG./TURN	OUTPUT SHAFT	# OF DEG./TURN
ILDTRA-2 201 RATIO	20	180 DEG.	9 DEG.	180 DEG.	9 DEG.
ILDTRA-2 401 RATIO	20	90 DEG.	4 1/2 DEG.	90 DEG.	4 1/2 DEG.

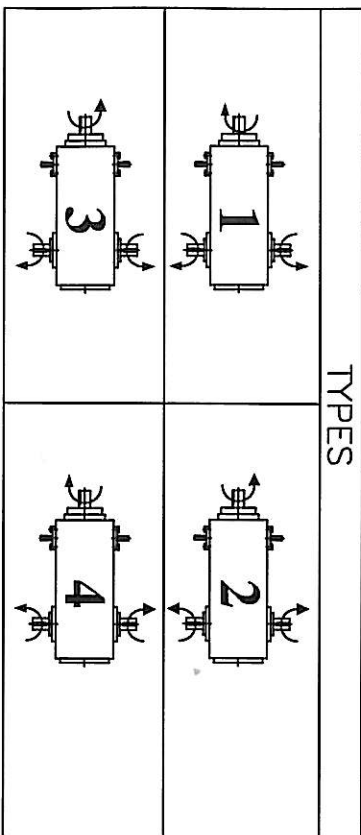

- NOTES:
1. HORSEPOWER - 1.6 H.P. @ 300 RPM - MAX. SPEED 600 RPM
 2. CONTROL SHAFT CAN BE MOTORIZED FOR REMOTE OPERATION
 3. LUBRICATION: 2 PINT - MOBIL GEAR # 629
 4. WEIGHT : 40 LBS./ 45 LBS W/MOTOR.

EIMP		SCALE: 1:4	TITLE: IN-LINE DIFFERENTIAL 90 DEG. ILDTRA-2	REV:
TOL EXCEPT AS NOTED		CAD#	FINISH:	DRAWN: D.K.
+/- .005	+/- 1/64	+/- 1/2	DATE: 1/24/08	DR# B3419
				APR: